

Maxflex Product Manual

Better Choice of Clear Aligner

Maxflex Dental Sheets

Maxflex - A Global Leading Manufacturer
in Comprehensive Orthodontic Treatment Material



Mono-layer Sheets

- Excellent mechanical properties
- Versatile usage: Attachment templates/Aligners/Retainers
- TPU sheets: Highest initial force for fast movement of the teeth
- Copolyester sheets: Excellent stain resistance and clarity



Multi-layer Sheets

- Perfect balance of flexibility, elasticity, and strength
- Provide more treatment options for orthodontists and patients
- Composite polyurethane material sheet:
Excellent wearing comfort and sustained orthodontic force
- Other composite sheets:
Excellent stress retention ratio, stain resistance and transparency



Functional Sheets

- Hybrid night guard
- Aesthetic sheets for Hollywood smile aligners
- Hybrid sheets for drug-eluting aligners



Maxflex
Dental Sheet
spec.

Series	Thickness(mm)	Φ(mm)	Roll width(mm)
Single-Layer	0.4 / 0.63 / 0.76 / 1.00	120/125/133	102/137
Multi-Layer	0.63 / 0.76 / 1.00	120/125/133	102/137
Hybrid Night Guard	1.00 / 1.30 / 2.00	120/125	

Maxflex Accessories




Transparent Lingual Button: Maxlink LB 01

- Light and small (0.9mg) but durable (more than 30N loading)
- Precise and stability(parting line less than 0.1mm)
- Medical grade material complied with ISO 13485



Orthodontic Wax: Maxlink ODW 120

- Medical material, safe and non-toxic, free of plasticizers
- User-friendly, no need for heating to achieve thixotropy
- Heat-resistance, good shape retention
- High bonding strength with dental models, no residual left on the aligner

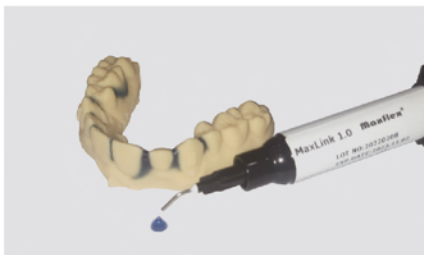

UV Cured Blocking Resin: Maxlink UV 101

- Designed for 3D dental model gap
- High viscous and thixotropic property
- High hardness and heat resistance



UV Cured Medical Adhesive: Maxlink UV 201

- High bonding strength (more than 30N)
- Rapid bonding with most clear aligners
- Biocompatibility tested in accordance with ISO 10993

Shanghai Maxflex Medical Technology Co.,Ltd

Tel: +86-21-5956 0800 | Add: 1169 Anting Town Park Road, Jiading District, Shanghai | Email: service@maxflexbrace.com | Web: www.maxflexaligner.com



MaxPrint P2

Large Format High Speed 3D Printer



High Speed Efficiency

Capable of printing 15-20 flat dental models (with a layer thickness of 15-18mm) within 35 minutes, further reducing the chairside dental appliance production cycle.



Precise & Large Throughput

7K Resolution, $\pm 46\mu\text{m}$ Printing accuracy; . 10 seconds cycle time per 100 μm layer.



User Friendly

Calibration-free installation, LCD screen can be replaced within 5mins; Use pre-tension film for easy maintenance.

MaxPrint P2 - High Speed 3D Printer


Build volume	290×160×190mm
Pixel size	46μm
Technology	LCD Technology
Dynamic layer thickness	0.05~0.1mm
Printing speed	Up to 36mm/hr

Size & Weight

Device dimension	480×500×650mm
Net weight	39kg
Package size	600×600×1000mm
Package weight	60kg

Software

Control system	Self-developed Master O.S.
Language	Chinese, English
Slicing software	MaxPanel
Operating system	Windows 7/8/10/11
File format (Import)	.stl, .obj
File format (Export)	.rs
Advanced functions	Editing, automatic repair, model cutting, hollowing, perforating, labeling
Wireless printing	One-Click Printing Task Transfer within LAN
Cluster management	Task Management for Multiple Devices within the LAN

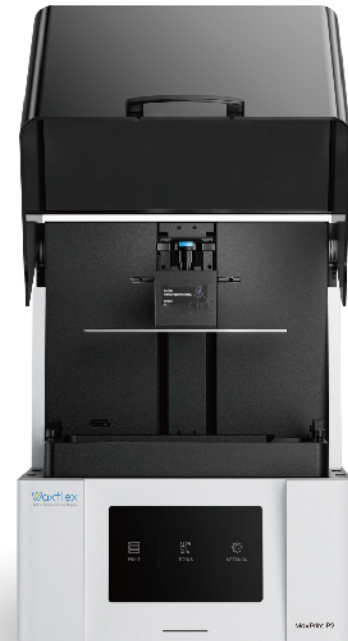

Hardware

LCD screen	13.6-inch 7k
Light source	405nm LED
Resolution	6480×3600 pixels
Door control	Printing will be paused automatically if the hood/door is opened (Optional)
Heating module	Automatic heated build platform
Air filtration	Built-in air filter in printing chamber
Touchscreen	10" touchscreen
Connectivity	USB2.0, Wireless network (2.4GHz), Ethernet
Input	100~120 VAC, 50/60Hz 220~240 VAC, 50/60Hz (Depending on the country/region)
Rated power	500W

Shanghai Maxflex Medical Technology Co., Ltd



MaxPrint P1

High Speed 3D Printer



High Speed Efficiency

6 tiled orthodontic models can be printed quickly within 15 minutes, further shortening the production time of chairside aligners.



Precise & Large Throughput

4K Resolution, $\pm 50\mu\text{m}$ Printing accuracy; ~ 9 seconds curing time per $100\mu\text{m}$ layer.



User Friendly

Calibration-free installation, LCD screen can be replaced within 5mins; Use pre-tension film for easy maintenance.

MaxPrint P1 - Chairside High Speed 3D Printer

Build volume	192*120*190mm
Pixel size	50μm
Technology	LCD Technology
Dynamic layer thickness	0.05~0.1mm
Printing speed	Up to 48 mm / 1 hour (Depending on the resin type and slicer settings)

Size & Weight

Device dimension	390x420x535mm
Net weight	26kg
Package size	550x540x900mm
Package weight	42kg

Software

Control system	Self-developed Master.OS
Language	Simplified Chinese, Traditional Chinese, English, Japanese
Slicing software	ShapeWare
File format (Import)	.stl, .obj
File format (Export)	.rs, .shape
Advanced functions	Support editing, automatic repair, model cutting, hollowing, perforating, labeling
Wireless printing	Deliver printing tasks to specified printer in LAN environment via "One Click" operation
Cluster management	Manage the printing tasks of multiple devices in LAN environment



Hardware

LCD screen	8.9" 4K mono screen
Light source	405nm LED light source
Resolution	3840×2400 pixels
Heating module	Automatic heated build platform
Air filtration	Built-in air filter in printing chamber
Touchscreen	7" touchscreen
Connectivity	USB2.0, Wireless network (2.4GHz), Ethernet
Input	100~120 VAC, 50/60Hz 220~240 VAC, 50/60Hz (Depending on the country/region)
Rated power	320W



Shanghai Maxflex Medical Technology Co.,Ltd

Tel: +86-21-5956 0800 | Add: 1169 Anting Town Park Road, Jiading District, Shanghai | Email: service@maxflexbrace.com | Web: www.maxflexaligner.com



MaxForm L2

Automatic Dual-Aligner Pressure Thermoforming Machine



Significant Cost Reduction

Compared with single model, by using special designed ϕ 133mm sheet, the cost of the sheet can be reduced up to 40%.



Clinical Verification


Dual-aligner thermoformed aligners have been tested by industrial CT and have uniform thickness. More than 100,000 aligners have been clinically tested, fit more than 95% cases.



Extra Long Heating Element Service Life

The equipment uses refined heating components and provides stable temperature control; The service life of the heating element can reach 20,000 hours.

MaxForm L2 - Automatic Dual-Aligner Pressure Thermoforming Machine



Based on many years of experience in forming invisible orthodontic aligners and an in-depth understanding of the rheological behavior of polymer materials, Maxflex's new era thermoforming machine improves existing equipment and undergoes detailed clinical verification to propose a new technology process of dual models, doubles the production efficiency for aligner manufacturers. The product design is based on the concept of "Continuous Improvement and Sustainable Development" of Maxflex, making it easier for users to operate, maintain, and be more durable.

Significant Cost Reduction and Efficiency Increase: Compared with pressing one aligner with 120mm/125mm sheet, Maxform L2 can produce two aligners with 133mm sheet at one time, which improves the utilization rate of dental sheet by 30%-40%.

Uniform Aligner Thickness: The thickness of the two aligners is evenly distributed after industrial CT scanning.

Dual Model Applicable Range: Clinical trials have exceeded 100,000 aligners, and double-thermoforming machine can be applied to most cases of small and medium-sized arches.

High Thickness Utilization: Through optimized pressure and temperature conduction, compared with traditional thermoforming, the aligner thickness is increased by about 0.05~0.1mm and thinner sheets can be used to achieve the same aligner effect.

Long Service Life of Heater: Adopting uniform temperature control ceramic heater, compared to traditional thermoforming machine, the service life of heater can reach more than 3 times.

Automatic Operation: With one-button start, the whole process is efficient and fast in a short cycle time.

Compatible with Two Specifications: Supporting switching of ϕ 125mm/133mm dental sheet, easily to change kits.

Equipment Parameters:

Input	220VAC, 50Hz
Pressure	0-4.5 Bar
Power	1000W
Heating Power	800W
Device Dimensions	450x450x620mm
Device Net Weight	75kg
Control Method	Touch screen and physical buttons
Supported Sheet Size	Round shape with ϕ 125mm, ϕ 133mm
Package Dimensions	560x550x830mm
Package Weight	90kg



Standard Base Plate




V1 Base Plate



V4 Base Plate

Shanghai Maxflex Medical Technology Co.,Ltd

Tel: +86-21-5956 0800 | Add: 1169 Yuanqu RD, Anting Town, Jiading District, Shanghai, China | Email: service@maxflexbrace.com | Web: www.maxflexaligner.com

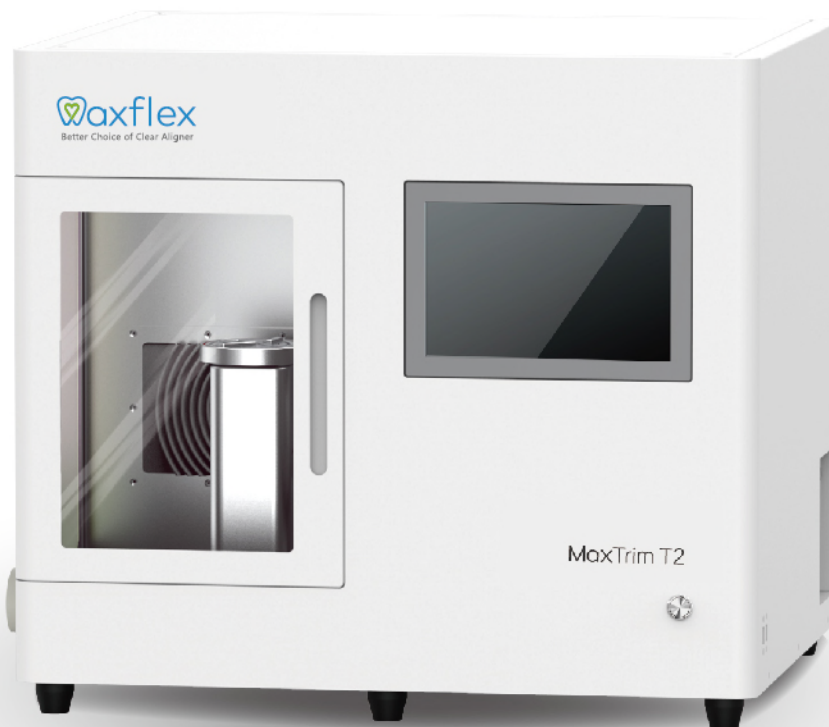

MaxTrim T2

Five-Axis Linkage Dual-Model Aligner Trimming Machine



Cost Reduction and Efficiency Improvement

Dual model trimming can be completed within one minute, which greatly reduces production cost and improves production efficiency.



User Friendly


Use equipped fast visual scan facility MaxScan to obtain processing files to avoid manual operation errors.



Designable Trimming Line


The advanced OrthoCurve gingiva line software developed by Maxflex, support automatic line generation and rapid adjustment functions.

MaxTrim T2 - Five-Axis Linkage Dual-Model Aligner Trimming Machine

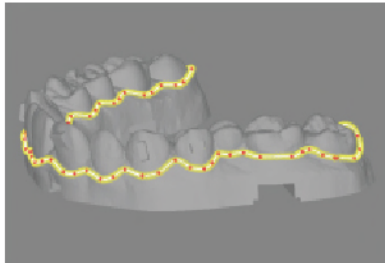

OrthoCurve- Dual Model Version Dedicated Gingiva Line Generation Software

- OrthoCurve can match any orthodontic design software through synchronizing model editing module.
- Equipped with an exclusive dual model trimming module, it automatically generates dual model trimming line.
- Highly flexible and easy to operate, it can handle a variety of aligners production demands.



Cost Saving: Two aligners can be finished at the same time within one minute, and the material cost can be reduced by 40% when used with a dual model thermoforming machine.


Stable Trimming: Compared with manual trimming, MaxTrim T2 provides high efficiency and stable consistent product quality.

Excellent Quality: Equipment accuracy is $\pm 0.01\text{mm}$, the trimming edge is almost burr-free with less after-polishment.

Wide Applicability: It can be flexibly matched mostly any orthodontic design software around the world, and supports trimming multiple thicknesses (0.5mm~2.0mm), multiple materials (PETG, TPU, etc.) and multiple types of sheets (single-layer, double-layer and Composite sheets).

Easy to Operate: Any dual models can be randomly placed in MaxTrim T2 to obtains processing file by MaxScan without misplacement; vacuum positioning can quickly be set within in 1 second.

User-friendly operation: The vacuum quickly adsorbs the film sheet in just 1 second. It can be used in conjunction visual recognition device, allowing random placement of any model from the same case. The device automatically identifies and sends it to the trimming machine.

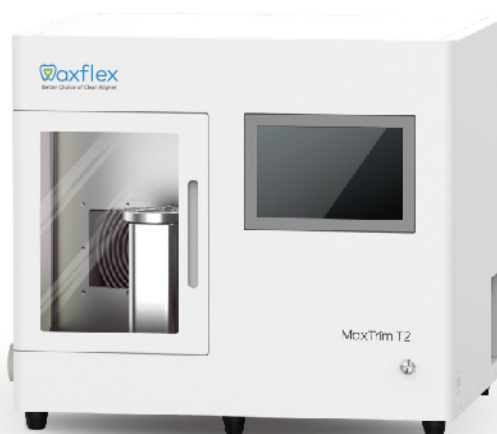

Equipment Parameters:

Equipment type	Five-axis linkage
Power	White
Input	Aviation aluminum
Trimming mothod	Single/Dual
Trimming positioning accuracy	$\pm 0.01\text{mm}$
Spindle speed	Max 60,000rpm
Spindle power	800W
Display type	10.1-inch LCD Touchscreen
Aligner fixation method	Groove+ Vacuum adsorption
Trimming time	25-30s/pc
Equipment size	670×580×585mm
Equipment net weight	100kg
Matching table	1080×600×870mm
Net weight of table	105kg[Include vacuum & dust collector]

Shanghai Maxflex Medical Technology Co.,Ltd

Tel: +86-21-5956 0800 | Add: 1169 Yuanqu RD, Anting Town, Jiading District, Shanghai, China | Email: service@maxflexbrace.com | Web: www.maxflexaligner.com



MaxTrim T1

Five Axis Linkage Aligner Trimming Machine



Self-Executing

Replacing traditional manual cutting machines to improve production efficiency and enhance professional image



User Friendly


Standard fast visual recognition equipment, "MaxScan" for automatic recognition to obtain processing files to avoid manual errors



Customize Software

Advance "OrthCurve" gingiva line software has function of automatic generation and rapid adjustment, which can match various needs for aligner production

MaxTrim T1 - Five Axis Linkage Aligner Trimming Machine

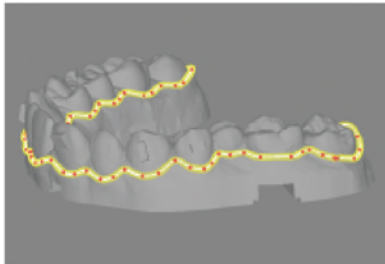

OrthCurve Software

Auto-Specialized Gingiva Line Software

Integrated model editing module, more powerful with fully automatic generation of Gingiva line function, fast acquisition of gingiva line, strong flexibility, and the ability to quickly adjust the height and curvature of gingiva line according to customer needs, which can meet various needs for aligners production.

Cost Saving: MaxTrim T1 replaces traditional manual cutting machines and improve production efficiency.

Easy and Safe Operation: Vacuum adsorption for 1 second, efficient loading and unloading; Process is carried out within the lock-up chamber to ensure safe operation

Wide Applicability: Flexible matching with any orthodontic design software worldwide; Supports cutting multiple thicknesses and types of sheets (0.5~3.0)

Efficient, Precise, and Stability: Complete single piece cutting in an average of 30 seconds, with equipment accuracy of $\pm 0.01\text{mm}$; Adopting whole disc vacuum adsorption, with an adsorption force of over 100N

Zero Error Rate: MaxScan S1 scanning module can be added to automatically match and import corresponding data on a one-to-one basis, avoiding manual data import errors and achieving zero operational errors

Excellent Trimming: Trimming edges with almost no burrs, suitable for membranes such as PETG, TPU, and Multi-layer Materials.



Equipment Parameters:

Equipment Parameters	Five axis linkage
Exterior	White
Material Quality	Aviation Aluminum
Electric Motor	High Performance Servo Motor
Gas source	Independent Air Source
XYZ Positioning Accuracy	$\pm 0.01\text{mm}$
XYZ Repositioning Accuracy	$\pm 0.02\text{mm}$
Spindle Speed	30,000rpm
Spindle Power	500W
LCD	7 Inch Smart Touch Screen
Material Fixation Method	Negative pressure Adsorption
Trimming Time	25-30s/pc
Equipment Size	570×530×535mm
Equipment Net Weight	85kg

Shanghai Maxflex Medical Technology Co.,Ltd

Tel: +86-21-5956 0800 | Add: 1169 Anting Town Park Road, Jiading District, Shanghai | Email: service@maxflexbrace.com | Web: www.maxflexaligner.com



MaxScan S1

Adaptive Deep Visual Recognition Equipment



Auto Import

Scan the number on the resin model and automatically import the corresponding cutting program to the corresponding trimming machine.



High Sensitivity


The device is equipped with transmembrane recognition technology, and its deep recognition algorithm can continuously learn, record, strengthen, and optimize the recognition effect to the best state.



Production Statistics

Accurately obtaining daily processing data through system recording, facilitating customers to do well in production statistics work.

MaxScan S1 - Adaptive Deep Visual Recognition Equipment



- ✔ Support - MaxTrim T1 Single mode recognition, MaxTrim T2 Dual model recognition import
- ✔ Support - Recognition of QR Codes, OCR characters, and other types
- ✔ Support - Transparent dental sheet with a thickness of 0.4~2.0mm for sheet recognition, unaffected by reflection
- ✔ Support - Docking with the client's MES system

Automatically Import and Load Data: Scanning the number on the resin model, the device can automatically import the corresponding marking and trimming program for the model and send it to the corresponding trimming, thereby eliminating the need for manual operation steps

High Recognition Rate and Compatibility: The device is equipped with membrane recognition technology, which can recognize the model after scanning and pressing the membrane; By using deep recognition algorithms, it is possible to learn and record the printed results in depth, and continuously enhance and optimize the recognition effect, so as to continuously improve the recognition rate to the optimal state

Capable of Production Statistics: Every recognition behavior of the equipment is recorded by the system to form daily processing data and provide accurate feedback on daily production cutting data; If there is a situation of missing processing, feedback can be obtained clearly through visual equipment, which facilitates customers to do production statistics work well

Equipment Parameters

Size	350x300x590mm
Weight	20kg
LCD	10.1Inch Touch Screen
Network	Wifi
Supporting Content	QR Codes, and OCR characters
Recognition Ability	Deep adaptive learning function
Backlight	Soft white Backlight Module
Auxiliary Functions	Production Statistics Function



Shanghai Maxflex Medical Technology Co.,Ltd

Tel: +86-21-5956 0800 | Add: 1169 Anting Town Park Road, Jiading District, Shanghai | Email: service@maxflexbrace.com | Web: www.maxflexaligner.com



MaxMark M2

UV Laser Marking Machine



Strong Compatibility

It can meet the marking needs of multiple types of sheets with different materials, thicknesses, and layers. One device can cover all types of sheets.



Excellent Result

The marking content is clear, uniform, and without any explosive points. After marking, the surface of the aligner is relatively smooth and will not cause excessive burning.



Auto Focus

Adopting an adaptive height adjustment device, the laser position can be automatically adjusted for marking based on different height models, with simple and user-friendly operation.

MaxMark M2 - UV Laser Marking Machine

Strong Compatibility: It can meet the marking needs of multiple types of sheets with different materials, thicknesses, and layers. One device can cover all types of sheets.

Excellent Result: The marking content is clear, uniform, and without any explosive points. Due to the short wavelength of this laser, the material absorption energy caused by the dental film is controllable. After marking, the surface of the aligner is relatively smooth and will not cause excessive burning (ordinary optical fibers cause excessive burning).

Stable Use: It comes with a matching water cooling device, which can cool the UV laser with water to ensure stable and standard-reaching results.

Automatic Focus: After placing models of different heights, the laser height can be automatically adjusted, which is simple to operate and efficient.



Parameter

Laser Types	UV Laser
Laser Power	3W
Laser Wavelength	355nm
Frequency Range	20kHz-150kHz
Pulse Width	< 15ns@30kHz
Scan Head	Auto Height Focus
Software	EZCAD2
Scan Field	110x110mm/150x150mm
Cooling System	Water Cooling
Power	220V±10%/50HZ
Machine Size	870x530x530mm
Machine Weight	60kg
Cooling Machine Size	640x360x570mm
Cooling Machine Weight	26kg

Shanghai Maxflex Medical Technology Co.,Ltd

Tel: +86-21-5956 0800 | Add: 1169 Anting Town Park Road, Jiading District, Shanghai | Email: service@maxflexbrace.com | Web: www.maxflexaligner.com



Max0ral V1

Calibration-Free | 3D True Color |
Humanized Scanner Tip



Humanized scanner tip

The scanner tip is actively integrated with heating system inside, with fast heating speed and constant temperature; the angle of the mirror of the scanner tip is close to 45°, which can better take into account the scanning area of anterior and posterior part.



Easy detachable

The scanner tip can be replaced by a simple plug in and out operation, and the disinfection methods of immersion disinfection and high temperature and high pressure sterilization are both available.



Aluminum alloy screw-in connection

The replaceable Type-C data cable adopts a screw connection design to better ensure a stable connection during operation.



MaxOral V1 - Intraoral Scanner

Specifications - Complete Machine

Scanning Distance:	0-15mm
Scanner Weight:	210g
Scanner Size:	240 x 49.5 x 30.5mm

Scanning Technology

Image Capture Technology:	Optical continuous video collection
Imaging Mode:	Synchronous 30 video
FPS:	15
Scanner Light Source:	LED
FOV:	13 x 13mm

Accuracy


Single crown $\leq 10\mu\text{m}$, single arch $\leq 15\mu\text{m}$, full arch $\leq 20\mu\text{m}$

Scanner Tip


Normal Scanner Tip Size:	79 x 19.7 x 15.8mm
Smaller Scanner Tip Size:	80 x 16 x 11mm
Scan Area (Standard):	15 x 15mm
Scan Area (Mini):	12 x 12mm
Depth of Field:	15mm
Autoclavable:	Up to 100 times Autoclavable 121°C 16 mins I Autoclavable 134°C 4 mins
Single Arch:	30s
Full Arch with Occlusion:	90s

Other

Base:	Small base without cables connection
Export File:	STL, PLY, OBJ
Operating Time:	> 30000hrs
Quick Reset:	Yes
Data Optimization:	Yes
Remote Control Function:	Yes
Calibration:	Calibration free
Multilingual System:	Chinese, English, French, Spanish, Russian, Portuguese, Italian, Greek, Polish, Romanian, Japanese, Korean, Turkish, Czech, German



Normal Scanner Tip Size



Smaller Scanner Tip Size

Shanghai Maxflex Medical Technology Co.,Ltd

Maxflex 3D Printing Post-Processing Series



MaxCure C1 Curing Box

The MaxCure series provides a reliable solution for the final step in the production of 3D dental models. Utilizing customized light arrays, it ensures uniform and efficient curing of dental models.

The MaxCure C1 is designed for curing dental models and small-sized parts. It features a rotatable knob for customizing the curing time. Equipped with multiple 405nm LED light sources, and offers a 360° automatic rotation to achieve comprehensive drying.

Parameter

Curing Size	φ160 x 170mm
Optical Wavelength	405nm array LED Replaceable Equivalent Fluorescent Light
Power	18W
Curing Method	Multiple Light Sources With 360 ° Internal Reflection
Operation Interface	Timing Knob
Power Requirement	100~120VAC, 50/60Hz 220~240VAC, 50/60Hz (Depending on sales country/region)
Machine Power	25W
Equipment Size	225 x 215 x 265mm
Equipment New Weight	4kg



MaxCure C2 Curing Box

The MaxCure series provides a reliable solution for the final step in the production of 3D dental models for invisible orthodontics. Utilizing customized light arrays, it ensures uniform and efficient curing of dental models.

The MaxCure C2 is designed for curing dental models and large-sized parts. It offers one-click curing for parts made of the same material and easy to operate. It can meet the needs of different batch production requirements. It offers beeps when curing is complete, simplifying process management.

Parameter

Curing Size	φ300 x 130mm
Optical Wavelength	405nm array LED Replaceable Equivalent Fluorescent Light
Power	270W
Curing Method	Multiple Light Sources With 360 ° Internal Reflection
Hot Air Drying	600W, Hot Air Convection Heating and Drying
Operation Interface	3.5-Inch Color Capacitive Touch LCD Screen
Power Requirement	100~120VAC, 50/60Hz 220~240VAC, 50/60Hz (Depending on sales country/region)
Machine Power	350W
Equipment Size	412 x 404 x 286mm
Equipment New Weight	15kg

Maxflex 3D Printing Post-Processing Series




MaxScape MS2 Dental Automatic Scrape Machine

The MaxScape MS2 is an automated scraper specifically designed for the MaxPrint P2.

With a one-click operation, completing each scraping operation in 50 seconds. The buzzer sounds at the end of the process for easy progress tracking. It features a blade cleaning mode for convenient daily maintenance. Equipped with an emergency stop mode to ensure operational safety.

Parameter

Scraper Length	300 mm
Scraper Stroke	0~160 mm
Compatible Printer	Max Print P2
Operation Interface	Buttons and Indicator Lights
Power Requirements	100~120 VAC, 50/60 Hz 220~240 VAC, 50/60 Hz
Total Power Consumption	30 W
Device Dimensions	700 × 370 × 480 mm
Net Weight of Device	31 kg
Door Opening Dimensions	700 × 411 × 633 mm
Packaging Dimensions	750 × 420 × 530 mm
Packaging Weight	33 kg



MA 080SD/MA 020SD Ultrasonic Cleaner(Max/Mini)

The ultrasonic cleaner, featuring advanced ultrasonic technology and a high-quality stainless steel tank, delivers efficient and deep cleaning, providing an excellent foundation for subsequent curing or polishing processes.

Equipped with a heating function, it can thoroughly clean the surface of dental models, removing residual resin and impurities.

The intuitive interface is complemented by multiple safety protection measures to ensure safe use.

Two sizes are available. The MA 080SD is designed for large-scale dental model cleaning, while the MA 020SD is suitable for small-scale cleaning tasks.

Parameter

Weight	16.2kg [Max] / 4.4kg [Mini]
Heating Power	600W [Max] / 150W [Mini]
Cleaning Tank Dimensions	550 × 300 × 150mm [Max] / 240 × 135 × 100mm [Mini]
Basket Dimensions	465 × 265 × 132mm [Max] / 223 × 123 × 84mm [Mini]
Power Supply Specification	220V~240V

Shanghai Maxflex Medical Technology Co.,Ltd

Tel: +86-21-5956 0800 | Add: 1169 Yuanqu RD, Anting Town, Jiading District, Shanghai, China | Email: service@maxflexbrace.com | Web: www.maxflexaligner.com

Polishing and Grinding Series Products



MA 069 Dustproof Chamber

Equipped with an efficient dust collector that operates with low noise. It can effectively remove dust generated during grinding and polishing, providing a safe and comfortable working environment. The built-in three-directional shadowless lighting reduces eye fatigue and enhances the precision of operations. It's easy to maintain, with a waste bin that is conveniently removable for cleaning, offering a clean and bright working environment for aligner grinding and polishing.

Parameter

Weight	16kg
Product Main Body Dimensions	500×475×300mm
Input Voltage And Frequency	110~240V, 50~60Hz
Built-in Vacuum Cleaner	
Maximum Air Pressure	15Kpa
Maximum Vacuum	-8.8Kpa
Maximum Noise Level	55dB
Motor Power	180W
Built-in Light	
Power	14W
Lumens	1400lm
Color Temperature	6500K



MA 202 Polishing Handpiece

Equipped with a high-efficiency brushless motor, the speed range can reach 0~50,000rpm, durable and stable. It features infinite speed control to meet a variety of grinding needs. Built-in overload protection ensures the safety of use and equipment performance.

Parameter

Maximum Speed	50,000 revolutions per minute (rpm)
Output Power	100W
Rated Current	2A
Input Voltage	220V/50Hz
Maximum Torque	48N.cm
Speed Control	Manual/foot pedal infinite speed adjustment
Direction Function	Forward/reverse rotation switching
Safety Feature	Automatic overload protection

Polishing and Grinding Series Products



MA 045 Lifting Tool

Easily remove dental aligner after cutting, improving the efficiency of removal and protecting the integrity of the aligner. Replaces manual operation, achieving an efficient and clean experience for removing dental.

Size: 45x0.5mm (working end), overall length 165mm

Specifications: 1 piece per pack



MA 023 Triangle-edged Needle

Made from hard alloy material, wear-resistant and corrosion-resistant, with a longer service life. The trihedral cone design at the head provides more precise cutting and trimming effects, effectively improving the efficiency of subsequent polishing.

Size: 2.3x10x45mm

Specifications: 1 piece per box



MA 027 Polishing Wheel(Hard)

Utilizing specially developed materials to achieve efficient grinding. It has a long service life, with a single lifespan that can last up to 7 days. Stain-resistant and color-resistant, it can effectively prevent staining of the dental aligner after polishing.

Size: $\phi 27 \times 4 \text{mm}$

Specifications: 10 pieces per pack



MA 008 Bullet-shaped Polishing Head

Designed specifically for polishing aligners and offers a moderate firmness. Stain-resistant and color-resistant, it ensures a smooth and rounded surface of the dental appliance after polishing, while maintaining its original color, enhancing the comfort of wearing.

Size: $\phi 8 \times 17 \text{mm}$

Specifications: 12 pieces per pack



Shanghai Maxflex Medical Technology Co.,Ltd

Tel: +86-21-5956 0800 | Add: 1169 Yuanqu RD, Anting Town, Jiading District, Shanghai, China | Email: service@maxflexbrace.com | Web: www.maxflexaligner.com



www.maxflexaligner.com

Building 1, 1169 Yuanqu RD, Anting Town, Jiading District, Shanghai, China

Tel: +86-21-5956 0800 | Fax: +86-21-5956 3088 | E-mail: service@maxflexbrace.com